



SOLATUBE® Turret extension



50mm turret extension shown – other sizes available please contact your Solatube supplier for more details

Parts list

	Qty
Turret extension	1
Sealant	1

This installation procedure is for Solatube installations where additional turret height is required.


First complete the Solatube 160DS & 290DS installation instructions Steps 1- 5

Step A

Apply a bead of sealant around the outside of the top edge of the flashing up-stand. Place the turret extension over the flashing up-stand and push down until the inside of the turret extension contacts the top of the flashing up-stand (**diagram 1**).

Drill a 2mm hole through the lower holes of the turret, into the flashing up-stand and fasten the turret extension to the flashing up-stand with four 6mm screws (not provided). Ensure that the sealant has made a watertight seal and remove any excess sealant inside and outside the turret. Seal the heads of the screws with sealant.

Diagram 1

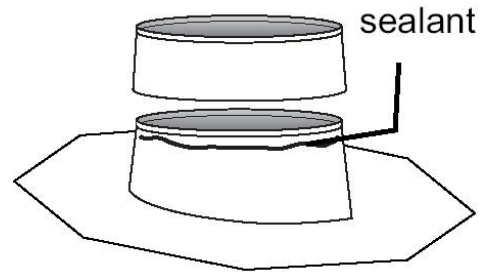

Please now continue to Step 6 of the Solatube 160DS & 290DS installation instructions

ML-INST-BU-T